


SPX

Portabrocas de autoapriete de Súper Precisión
con llave de apriete suplementario

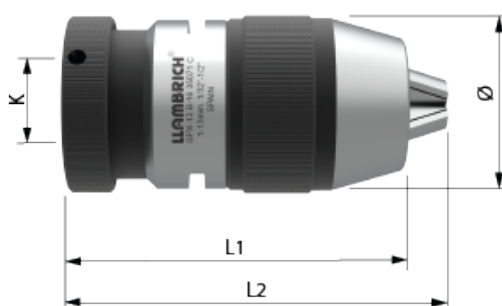

REFERENCIA	CAPACIDAD		FIJACIÓN	DIMENSIONES			PESO
número	mm	pulgadas	K	Ø	L1	L2	gr
SPX-06 B-10	0,3 - 6,5	1/64" - 1/4"	B-10	33	62	70	580
SPX-06 B-12	0,3 - 6,5	1/64" - 1/4"	B-12	33	62	70	580
SPX-06 J-1	0,3 - 6,5	1/64" - 1/4"	J-1	33	62	70	580
SPX-08 B-12	0,3 - 8	1/64" - 5/16"	B-12	38	67	74	680
SPX-08 J-1	0,3 - 8	1/64" - 5/16"	J-1	38	67	74	680
SPX-08 J-25	0,3 - 8	1/64" - 5/16"	J-2S	38	67	74	680
SPX-10 B-12	0,5 - 10	1/32" - 3/8"	B-12	43	81	89	940
SPX-10 B-16	0,5 - 10	1/32" - 3/8"	B-16	43	81	89	940
SPX-10 J-2	0,5 - 10	1/32" - 3/8"	J-2	43	81	89	940
SPX-10 J-33	0,5 - 10	1/32" - 3/8"	J-33	43	81	89	940
SPX-13 B-16	1 - 13	1/32" - 1/2"	B-16	49	91	103	1.220
SPX-13 J-2	1 - 13	1/32" - 1/2"	J-2	49	91	103	1.220
SPX-13 J-33	1 - 13	1/32" - 1/2"	J-33	49	91	103	1.220
SPX-13 J-6	1 - 13	1/32" - 1/2"	J-6	49	91	103	1.220
SPX-16 B-16	3 - 16	1/8" - 5/8"	B-16	55	95	107	1.540
SPX-16 B-18	3 - 16	1/8" - 5/8"	B-18	55	95	107	1.540
SPX-16 J-33	3 - 16	1/8" - 5/8"	J-33	55	95	107	1.540
SPX-16 J-6	3 - 16	1/8" - 5/8"	J-6	55	95	107	1.540